



Application method

Shampooing and spray extraction

This cleaning procedure is suitable for the basic cleaning of all water-resistant carpets that can withstand mechanical treatment.



Step 1: Weather and general information

High levels of air humidity: Longer drying time!

Switch off underfloor heating.



Step 2: Check suitability for cleaning

Soak white cotton cloth in detergent and place on an inconspicuous part of the carpet (weigh down with canister if needed). Leave for approx. 15 minutes.

If the cloth absorbs the colour from the carpet:

No wet cleaning! Flooring not colour-fast.

If the carpet can be lifted from the surface below:

No wet cleaning! Adhesive not water-resistant.

Black, brown stains on the cloth and carpet:

No wet cleaning! Conductive adhesive.



Step 3: Vacuum the flooring

Thoroughly vacuum or brush the carpet. Check the flooring for damage. Ladders, bulges, etc.



The safety advice and instructions for use on the containers, the product information and the safety data sheet must be observed. Please also observe the cleaning and maintenance recommendations of the manufacturers as well as the instruction manual of the machines and equipment used.



Application method


Shampooing and spray extraction



Step 4: Dosing and preparing of the ready-to-use solution

First add water, then add the correct amount of detergent, following the dosage instructions on the label. Always use cold water! Submerge shampoo brush in the carpet shampoo solution.

Follow operating instructions. Wear personal protective equipment.

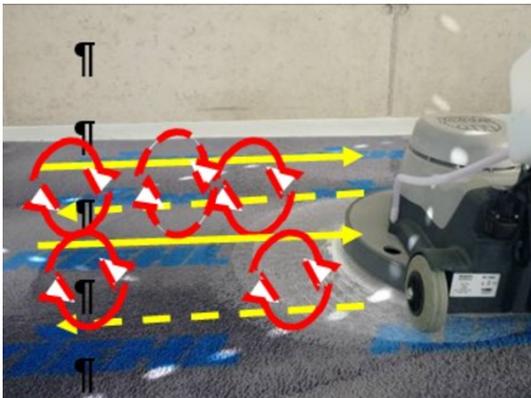

Step 5: Shampoo

Pour product solution into the cleaning tank of the rotary floor machine. Place the machine on a start-up board (e.g. old doormat) and switch on. Add product solution from the tank until a stable foam forms.

Run the machine over the carpet in even, overlapping strokes, while adding cleaning solution from the tank and massaging into the carpet in a circular motion.



Step 6: Spray extraction

Switch on the spray extraction machine's vacuum and compressor motor. Operate spray arm, thoroughly rinse the flooring in overlapping strokes and then vacuum. After the rinsing process, vacuum the flooring without the spray arm activated in order to remove residual moisture. In the case of excessive foam, simply add a few squirts of defoamer to the suction hose of the spray extraction machine when switched on.

Step 7: Fluff up carpet pile

Use a soft, clean scrubber to fluff up the pile of cut-pile floorings. Then leave carpet to dry.



The safety advice and instructions for use on the containers, the product information and the safety data sheet must be observed. Please also observe the cleaning and maintenance recommendations of the manufacturers as well as the instruction manual of the machines and equipment used.



Application method

Shampooing and spray extraction



Step 8: Clean the devices

Clean devices with a damp cloth. Check cable for damage.



The safety advice and instructions for use on the containers, the product information and the safety data sheet must be observed. Please also observe the cleaning and maintenance recommendations of the manufacturers as well as the instruction manual of the machines and equipment used.